Greiner Vibrograf AG Mittelstrasse 2 4900 Langenthal Switzerland T: +41 62 916 60 80 F: +41 62 916 60 81 info@greinervibrograf.ch www.greinervibrograf.ch


Magnotest II

Manual

English

The Instrument MAGNOTEST II measures the magnetism of an object and displays the amount by means of red lights. The displayed amount is a relative value, strong, weak or not at all magnetic.

Control and display:

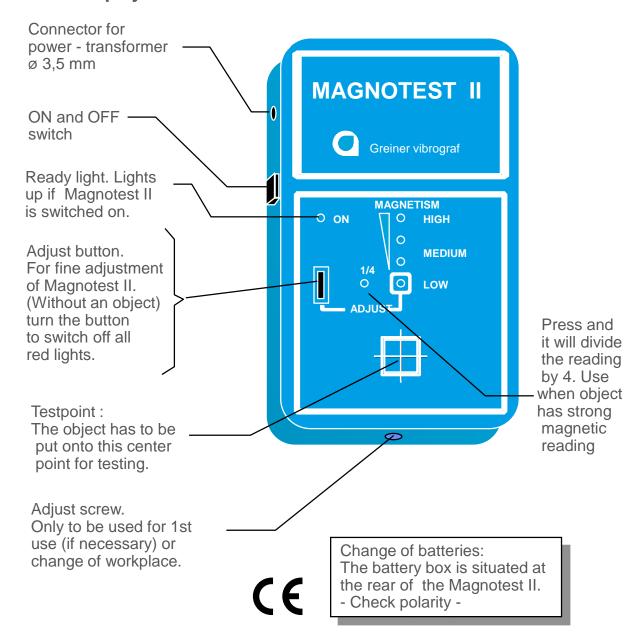

Manual

Working conditions:

1.1 Power supply 4 batteries UM3

or power - transformer 6 volt DC (min. 100mA).

Do not use the Magnotest II near magnetic fields like: 1.2 Workplace

transformers, speakers, motors etc.

1.3 Use the Magnotest II in room-temperature. Temperature.

2. Putting into operation:

> Switch on: Press switch on left side (LED (ON) lights up

Warming-up time: ca. 20 minutes

2.2 First operation

2.1

and change of Turn regulating device (Adjust) to ca. middle position (white line shows) and turn in front the calibration workplace:

potentiometer until all red lamps are off. Turn this small

screw with plastic screwdriver only.

3. Measuring:

> Important: If not all red lights have gone off before testing an

> > object, following adjustment has to be made.

3.1 Adjustment: Magnotest without object - turn regulating device in such

a manner until all red lights have gone off.

3.2 How to measure: Put the object to be measured direct onto the center point.

Longish objects like screws etc. usually signal a stronger

magnetism at their head or face.

For small objects you must use a pair of tweezers made

of brass.

3.3 Interpretation of the

deflection 2 or 3 red

lamps light up:

Relative values are being shown.

This shows if an object is strong, weak or not at all magnetic.

The object is relatively weak magnetic and can be demagnetized with the Greiner Magnomatic until all lamps are off.

4 red lamps light up: The object is relatively strong magnetic. Press reductor (1/4);

> this will show a 25% less than the effective magnetism. Demagnetize the object with the Greiner Magnomatic until it shows a noticeable weaker magnetism without using the

reductor(1/4).

To remove the magnetism of an object, we recommend the Greiner MAGNOMATIC.

Technical data:

Power supply transformer : 230 / 115 V / 6V =

Batterie : 4 x UM3 Weight

: 220 g : 16 x 10 x 3.5 cm Dimensions

